

## A B S T R A C T

An orthogonal signal generating unit converts a signal to be measured into two orthogonal signals which are two signals whose phases are orthogonal to one another. An instantaneous phase calculating unit calculates an instantaneous phase based on the two orthogonal signals within a range between a lower limit phase value set in advance and an upper limit phase value set in advance. A differential value detecting unit detects a differential value of the instantaneous phase. A differential value correcting unit corrects the differential value, and outputs a corrected differential value when the differential value of the instantaneous phase is over the range dependent on the lower limit phase value and the upper limit phase value. An offset component eliminating unit eliminates an offset component included in the corrected differential value from the corrected differential value output from the differential value correcting unit, and outputs a differential value from which the offset component has been eliminated. An integration unit determines a jitter amount of the signal to be measured by integrating the differential value which is output from the offset component eliminating unit, and from which the offset component has been eliminated.

(19) 世界知的所有権機関  
国際事務局(43) 国際公開日  
2005 年 6 月 2 日 (02.06.2005)


PCT

(10) 国際公開番号  
WO 2005/050230 A1

- (51) 国際特許分類<sup>7</sup>: G01R 29/02 2438555 神奈川県厚木市恩名 1800 番地 Kanagawa (JP).
- (21) 国際出願番号: PCT/JP2004/016136 (72) 発明者; および
- (22) 国際出願日: 2004 年 10 月 29 日 (29.10.2004) (75) 発明者/出願人 (米国についてのみ): 望月 健 (MOCHIZUKI, Ken) [JP/JP].
- (25) 国際出願の言語: 日本語 (74) 代理人: 鈴江 武彦, 外 (SUZUYE, Takehiko et al.); 〒1000013 東京都千代田区霞が関 3 丁目 7 番 2 号 鈴榮特許綜合法律事務所内 Tokyo (JP).
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:  
特願 2003-390560  
2003 年 11 月 20 日 (20.11.2003) JP (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, [続葉有]
- (71) 出願人 (米国を除く全ての指定国について): アンリツ株式会社 (ANRITSU CORPORATION) [JP/JP]; 〒

(54) Title: JITTER MEASUREMENT DEVICE AND JITTER MEASUREMENT METHOD

(54) 発明の名称: ジッタ測定装置及びジッタ測定方法

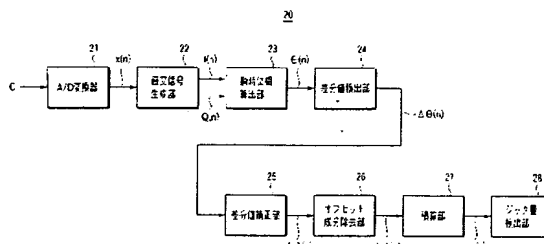

21...A/D CONVERTER  
22...ORTHOGONAL SIGNAL GENERATION UNIT  
23...INSTANTANEOUS PHASE CALCULATION UNIT  
24...DIFFERENCE VALUE DETECTION UNIT  
25...DIFFERENCE VALUE CORRECTION UNIT  
26...OFFSET COMPONENT REMOVAL UNIT  
27...ACCUMULATION UNIT  
28...JITTER AMOUNT DETECTION UNIT

(57) Abstract: An orthogonal signal generation unit converts a signal to be measured into orthogonal two signals which are two signals having phases orthogonal to each other. An instantaneous phase calculation unit calculates an instantaneous phase from the orthogonal two signals in a range between a predetermined lower limit phase value and a predetermined upper limit phase value. A difference value detection unit detects a difference value of the instantaneous phase. When the difference value of the instantaneous phase exceeds the range defined by the lower limit phase value and the upper limit phase value, a difference value correction unit corrects the difference value and outputs the corrected difference value. An offset component removal unit removes an offset component contained in the corrected difference value from the corrected difference value outputted from the difference value correction unit and outputs the difference value from which the offset component has been removed. An accumulation unit accumulates the difference value from which the offset component has been removed and which is outputted from the offset component removal unit, thereby calculating a jitter amount of the signals to be measured.

(57) 要約: 直交信号生成部は、被測定信号を互いに位相が直交する 2 つの信号である直交 2 信号に変換する。瞬時位相算出部は、前記直交 2 信号から瞬時位相を、予め定められた下限位相値と予め定められた上位相値との間の範囲で算出する。差分値検出部は、前記瞬時位相の差分値を検出する。差分値補正部は、前記瞬時位相の差分値が、前記下限位相値と前記上位相値とに依存する範囲を超えた場合に、その差分値を補正して補正された差分値を出力する。オフセット成分除去部は、前記差分値補正部から出力される前記補正された差分値から、当該補

[続葉有]